





RH410

产品说明书


RH410 专业音响 PROFESSIONAL AUDIO



固定安装 Application and installation

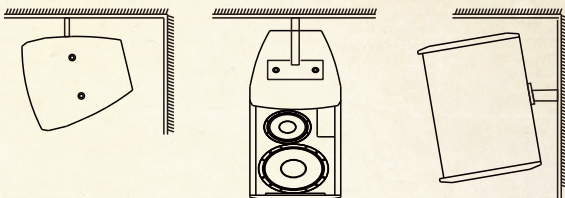

结构图纸 Construction Drawing:

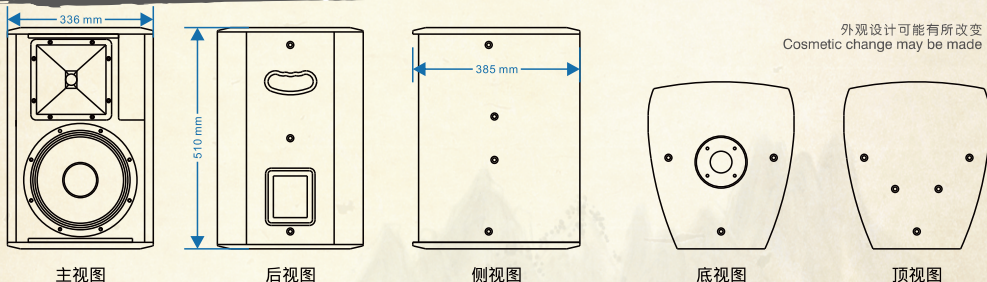

技术指标 Technical data & Inteoduction:

型号 Model	RH410
类型 TYPE	COMPACT, TWO-WAY PASSIVE 被动两分频全频
单元组成 Drivers	LF:1X10"(156mm)/2.5"(65mm)Voice-coil HF:1X1"(26mm)exit/1.75"(44mm)Voice-coil
频率响应 (+/-3dB) Frequency Response(+/-3dB)	65-10000Hz
覆盖角度 (-6dB) Dispersion(-6dB)	90x50(可旋转)
灵敏度 (1m/1W) Sensitivity(1m/1W)	97dB
输出声压级 maximum SPL	121dB continuous/127dB
额定阻抗 Nominal Impedance	8 Ohms
功率 Rated Power	250W AES / 500W PEAK
推荐放大器功率 Recommended AMP	300W-400W@8 Ohms
分频点 Crossover Frequency	1800Hz
输入连接器 Connectors	2x Neutrik NI4MP
产品尺寸 (HxWxD) Dimensions (HxWxD)	510mm x 336mm x 385mm
包装尺寸 (HxWxD) Packing Dimensions (HxWxD)	525mm x 345mm x 395mm
净重量 Net Weight	14.5kg
包装总重量 Gross Weight	16kg
箱体材料 Enclosure Material	优质高密度夹板
箱体网面 Enclosure Material	优质特制网棉, 内圆形钢网
表面喷漆 Finish	黑色耐磨环保水性阻燃漆喷料 (可定制颜色)
吊装点 Handing Position	19个M8螺丝吊装孔位
支撑座 Pole Mount	合金材质@35毫米标准底部支撑座
适用范围 Applications	音乐厅, 多功能厅, 礼堂, 会议室

博天下之銳意
展妙韻之升華



锐昇(博锐韵声)音响

广州锐昇(博锐韵声)音响设备有限公司

电话: 020-34560685

网址: <http://www.rise-audio.com>

地址: 番禺区石基镇傍西村玉带门大街六号雅景产业园内B1栋

颠覆娱乐行业的先行者!